



FOMEX[®]

Studio
Lighting
System

www.fomex.com

FOMEX[®]
digital leader

VER. 201804



FOMEX® E Series

FOMEX never misses user's various requirements such as a price, features, a safety, a design and a brand while choosing a studio flash. With perfect combination in both a precision of analogue and convenience of digital in photographing, E-series provide the best surroundings for photo-shooting.

Specifications

Spec	E200	E400	E600	E800	E1000
Max Flash Output	200 Ws	400 Ws	600 Ws	800 Ws	1000 Ws
F-Stop(1m,100iso)	F22.6 (6f-stops)	F32.7 (6f-stops)	F45.5 (6f-stops)	F64.0 (6f-stops)	F64.2 (6f-stops)
Voltage	AC 110V, AC 220V 50/60Hz				
Recycle time	0.1~0.7sec	0.1~1.0sec	0.1~1.3sec	0.2~1.3sec	0.3~1.7sec
Power increments in f-stop	1/10 f-stops				
Colour temperature in °K at Max. power	5,500k (±150k)				
Ready Charge	LED Light / Buzzer (Sound ON)				
Power range display	Digital				
Modeling lamp	Halogen 250W (E11 base, screw typed)				
Modeling lamp control	Volume controller (VR), Model (ON/OFF)				
Flash trigger	Photo cell, Cell button, Synchro cord				
Sync voltage	DC 8V				
Over temperature warning	Display (E0) on the FND / Warning Buzzer				
Over charge warning	Red LED				
Model, Cell, Beep, Test	ON/OFF				
Cooling system	DC Cooling Fan				
Dimension mm/in (W x L x H)	296x140x220 / 11.6x5.5x8.6	370x140x220 / 14.5x5.5x8.6	370x140x220 / 14.5x5.5x8.6	430x140x220 / 16.9x5.5x8.6	430x140x220 / 16.9x5.5x8.6
Weight	2.3kg / 5 lbs	2.8kg / 6.1 lbs	3.0kg / 6.6 lbs	3.4kg / 7.5lbs	3.6kg / 8 lbs



FOMEX® D² Series

FOMEX D-prop Studio Flash Lighting System aims for intuitive users interface. Professionals and amateurs alike can easily control and produce the perfect color gamut. **P1** Control of light intensity and power ON/OFF by a specified radio slave.

Specifications

Spec	D200p / D200p1	D400p / D400p1	D600p / D600p1	D800p / D800p1	D1000p / D1000p1
Max Flash Output	200 Ws	400 Ws	600 Ws	800 Ws	1000 Ws
F-Stop(1m,100iso)	F22.6 (6f-stops)	F32.7 (6f-stops)	F45.5 (6f-stops)	F64.0 (6f-stops)	F64.2 (6f-stops)
Voltage	AC 110V, AC 220V 50/60Hz				
Recycle time	0.1~0.7sec	0.1~1.0sec	0.1~1.3sec	0.2~1.3sec	0.3~1.7sec
Power increments in f-stop	1/10 f-stops				
Colour temperature in °K at Max. power	5,500k (±150k)				
Ready Charge	LED Light / Buzzer (Sound ON)				
Power range display	Digital				
Modeling lamp	Halogen 250W (E11 base, screw typed)				
Modeling lamp control	Volume controller (VR), Model (ON/OFF)				
Modeling lamp mode	Proportional / Max / OFF				
Flash trigger	Photo cell, Cell button, Synchro cord				
Sync voltage	DC 8V				
Over temperature warning	Display (E0) on the FND / Warning Buzzer				
Over Charge warning	Red LED				
Model, Cell, Beep, Test	ON/OFF				
Cooling system	DC Cooling Fan				
Dimension mm/in (W x L x H)	296x140x220 / 11.6x5.5x8.6	370x140x220 / 14.5x5.5x8.6	370x140x220 / 14.5x5.5x8.6	430x140x220 / 16.9x5.5x8.6	430x140x220 / 16.9x5.5x8.6
Weight	2.3kg / 5 lbs	2.8kg / 6.1 lbs	3.0kg / 6.6 lbs	3.4kg / 7.5lbs	3.6kg / 8 lbs





FOMEX[®] HD^{PI} Series

HD-prop flashes are equipped with powerful, 650w modeling light-bulb made by Osram.

Thanks to this solution, lamps are suitable for continuous light and facilitate your work under different lighting conditions.

PI Control of light intensity and power ON/OFF by a specified radio slave.



Specifications

Spec	HD200p / HD200p1	HD400p / HD400p1	HD600p / HD600p1	HD800p / HD800p1	HD1000p / HD1000p1
Max Flash Output	200 Ws	400 Ws	600 Ws	800 Ws	1000 Ws
F-Stop(1m,100iso)	F22.6 (6f-stops)	F32.7 (6f-stops)	F45.5 (6f-stops)	F64.0 (6f-stops)	F64.2 (6f-stops)
Voltage	AC 110V, AC 220V 50/60Hz				
Recycle time	0.1~0.7sec	0.1~1.0sec	0.1~1.3sec	0.2~1.3sec	0.3~1.7sec
Power increments in f-stop	1/10 f-stops				
Colour temperature in °K at Max. power	5,500k (±150k)				
Ready Charge	LED Light / Buzzer (Sound ON)				
Power range display	Digital				
Modeling lamp	Halogen 650W (GX 6.35 Base)				
Modeling lamp control	Volume controller (VR), Model (ON/OFF)				
Modeling lamp mode	Proportional / Max / OFF				
Flash trigger	Photo cell, Cell button, Synchro cord				
Sync voltage	DC 8V				
Over temperature warning	Display (E0) on the FND / Warning Buzzer				
Over Charge warning	Red LED				
Model, Cell, Beep, Test	ON/OFF				
Cooling system	DC Cooling Fan				
Dimension mm/in (W x L x H)	296x140x220 / 11.6x5.5x8.6	370x140x220 / 14.5x5.5x8.6	370x140x220 / 14.5x5.5x8.6	430x140x220 / 16.9x5.5x8.6	430x140x220 / 16.9x5.5x8.6
Weight	2.3kg / 5 lbs	2.8kg / 6.1 lbs	3.0kg / 6.6 lbs	3.4kg / 7.5lbs	3.6kg / 8 lbs



30 Flashes / Sec
1/8000
Duration time

FOMEX® G⁷ Series

Extremely fast recycling time and short flash duration of 1/8000s~1/500s with digital power display. Premium Design aluminum alloy housing, robust bracket and a new smart handle. Syncs perfectly with any DSLR for high speed photography with more than 30 flashes per second.

Specifications

Spec	G600
Max Flash Output	600Ws
F-Stop(1m,100iso)	F45.6 (6f-stops)
Voltage	AC 110V, AC 220V 50/60Hz
Recycle time	MAX. 0.6 sec
Power increments in f-stop	1/10 f-stops
Fuse capacity	10A
Duration time	1/500~1/8,000 sec (t0.5)
Colour temperature in °K at Max. power	5,500k (±150k)
Ready Charge	LED Light / Buzzer (Sound ON)
Power range display	Digital
Modeling lamp	Halogen 250W (E11 base, screw typed)
Modeling lamp control	Volume controller (VR), Model (ON/OFF)
Flash trigger	Photo cell, Cell button, Synchro cord
Sync voltage	DC 8V
Over temperature warning	Display (E0) on the FND / Warning Buzzer
Over Charge warning	Red LED
Model, Cell, Beep, Test	ON/OFF
Cooling system	DC Cooling Fan
Dimension mm/in (W x L x H)	390x140x220 / 15.3x5.5x8.6
Weight	3.2kg / 7.1 lbs

Accessories for E / D / HD / G / H



CSD
Concial Snoot



BARD
Backlight Reflector



PDD2
Pyrex Dome



PDD2S
Soft Pyrex Dome



PCD
Protect Cap



DR16
Ø 16cm



DR18
Ø 18cm



DR31
Ø 31cm

FOMEX® H1000 (Quartz)

Steady brightness with high color rendering and color temperature. Quartz Lights present of cooling fan extends the life span of the lamp and allows long term use.



Spec	H1000
Voltage	AC 110V, 220V 50/60Hz
Modeling lamp	Halogen 650W (GX 6.35 Base)
Modeling lamp control	Volume controller (VR)
Cooling system	DC Cooling Fan
Dimension mm/in (W x L x H)	296x140x220 / 11.6x5.5x8.6
Weight	1.5kg / 3.3 lbs

Accessories



BD18
Barn Doors




CF7
Color Filter set



ZS1224
Zoomspotlite set



SHC10 / SHC20
SHC30 / SHC40
Honeycomb for CSD
10° / 20° / 30° / 40°

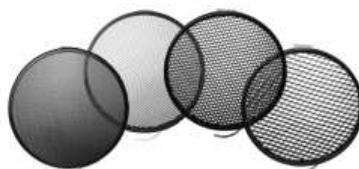

HC1810 / HC1820
HC1830 / HC1840
Honeycomb for DR18
10° / 20° / 30° / 40°



HC3120 / HC3140
Honeycomb for DR31
20° / 40°



HL 252
Modeling Lamp
250w / E & G & Dp



HL 652
Modeling Lamp
650w / HDp & H



Flash Tubes



Receiver Transmitter

RX-Free7s



HSA301

HSA302

Hot shoe PC SYNC



SC 55
5.5 SYNC Cable



EC 21
Power Cable 110V / 220V

Beauty Dish

BDR 55S / BDR 55W

Adjustable inner reflector allows free control of the light diffusion range. Interchangeable speedring function gives compatibility with various brands of studio flash.



Diameter : 550mm

Depth : 175mm (excluding adapter)

Color : Silver or White (inner) / Black (outer)

FOMEX *Para*


Para 180 / 200 / 230

Easy and quick assembly

Maximum light precision & projection

Ultra-deep design leads to even, wrap-around lighting

Durable fabric with highly reflective interior

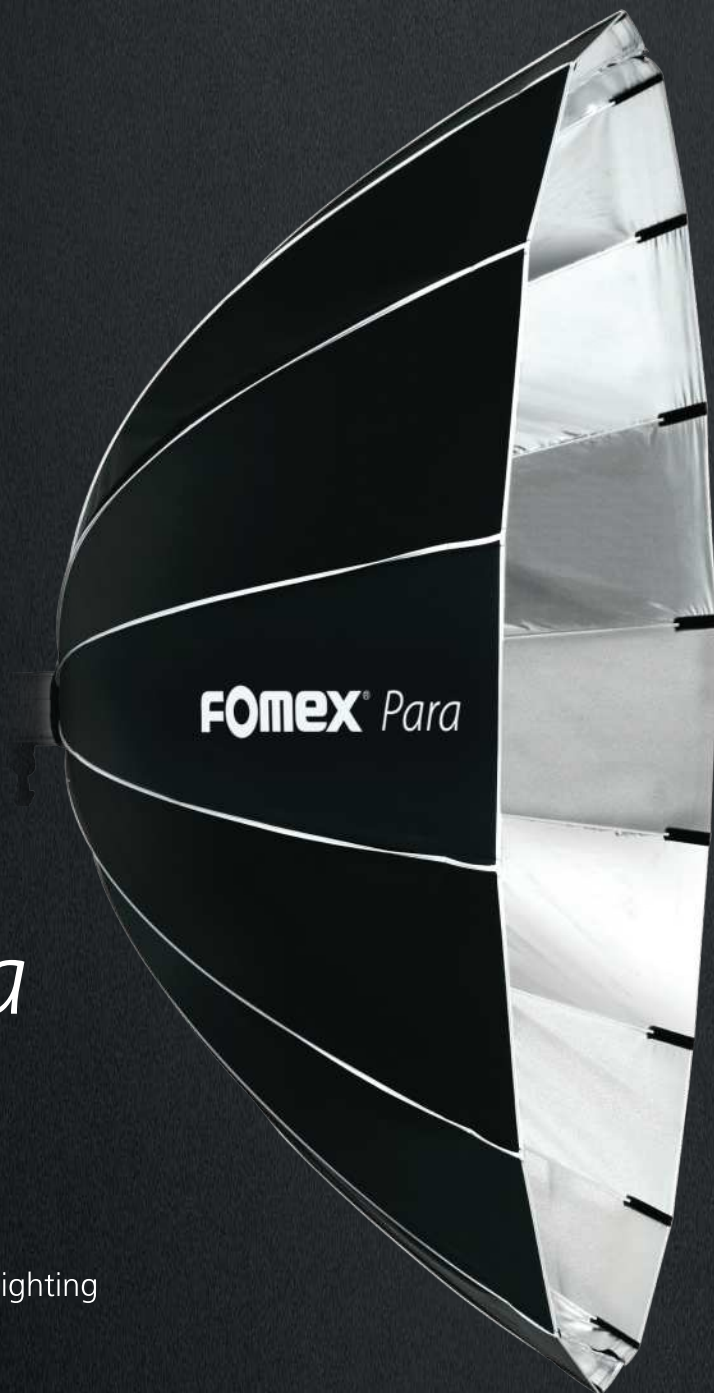

Spec	Ø 180	Ø 200	Ø 230
Depth	90cm	90cm	100cm
Weight	1.8kg	2.1kg	2.3kg



Soft boxes



RECTA



STRIP



SQUARE



OCTA



GRID



OCTA GRID



RECTA

30x60cm
40x60cm
40x70cm
50x70cm
60x80cm
60x90cm
75x100cm
80x100cm
80x120cm
90x120cm
100x140cm
120x180cm

STRIP

20x90cm
30x90cm
30x120cm
30x170cm
40x120cm
60x180cm
70x150cm
75x175cm

SQUARE

45x45cm
60x60cm
70x70cm
90x90cm
100x100cm

OCTA

Ø 90cm
Ø 120cm
Ø 150cm

GRID

30x90cm
40x60cm
40x120cm
60x90cm
70x70cm
80x100cm
90x120cm
100x100cm
100x140cm
Ø 90cm
Ø 120cm
Ø 150cm

Speedrings for Softbox



Fomex



Elinchrom



Broncolor



Profoto



Cricket



Hensel



Photogenic



Speedotron



Comet



Arri

Frame Reflector

- Light weight and durable with aluminum alloy frame.
- No rusting even for outdoor use.
- Easy installation with Elastic Cord inside of the frame.
- Double sided reflector and No rustling with Velcro.
- Specially designed according to the respective environment.
- Angle control, Broad usability.
- Multiple applications: Reflector, Chroma Key, Diffuser.
- Easy disassemble of the frame without completely removing the fabric.



Frame size : PFR1120 - 1.1m x 2m(43" x 79")

PFR1520 - 1.5m x 2m(59" x 79")

PFB2424 - 2.4m x 2.4m(95" x 95")

Weight : PFR1120 - 3.6Kg / PFR1520 - 4.2Kg / PFB2424 - 5.1Kg

Standard Package : Frame / Crossbar with Handle / Griphead / Bag / Fabric

Color : PFR1120 - Silver&White / Gold&White / Gold&Silver / Black&White / Diffuser

PFR1520 - Silver&White / Gold&White / Gold&Silver / Black&White / Diffuser / Chromakey

PFB2424 - Diffuser Only

Sun Diffusor

Softens the harsh light overhead, achieving the picture you want. Frames made of duralumin provide extra lightness and durability. Great for on location shoot.



Frame size : PSD0911 - 0.9m x 1.1m (36"x43")
 PSD1317 - 1.3m x 1.7m (51"x67")
Weight : PSD0911 - 1.7Kg / PSD1317 - 1.9Kg

Color : PSD0911 - Diffuser / Black Scrim, PSD1317 - Diffuser Only
Standard Package : Frame / Boom stick / Connecting Clamp / Bag / Fabric

Reflector

Perfect for on location and in studio photo/video shoot
 Reflects the light the way you want them.
 Available in different fabrics to give warmer or stronger tone.




Frame size : PBR1117 - 1.1m x 1.7m (43"x67")
 PBR1521 - 1.5m x 2.1m (59"x83")
Weight : PBR1117 - 2.8Kg / PBR1521 - 4.3Kg

Color : Silver&White / Gold&White / Gold&Silver / Diffuser / Black Scrim /
 Silver-Gold Stripe&Silver / Silver-Gold Stripe&Silver-White Stripe
Standard Package : Frame / Crossbar with Handle / Bag / Fabric

Umbrellas



UMW85/101
UMFW152/182
White
ø 85/101/152/182cm

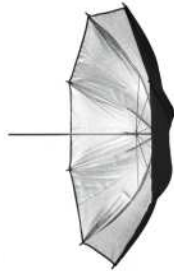

UMS85/101
UMFS152/182
Silver
ø 85/101/152/182cm



UMG85/101/152
Gold
ø 85/101/152cm



UMT85/101
Translucent
ø 85/101cm



UMB85/101
Brolly Boxes
ø 85/101cm

Reflectors (Light Disc)




RSW56/80/110
Silver/White
ø 56/80/110cm



RGS56/80/110
Gold/Silver
ø 56/80/110cm



RDF56/80/110
Diffuser
ø 56/80/110cm

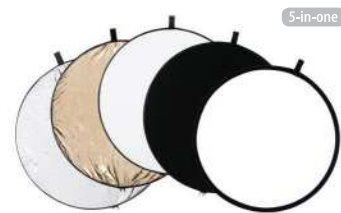

5IN1 56/80/110 V304
Gold/Silver/White/Black/Diffuser
ø 56/80/110cm

Flag Panels



FP1824
Silver/White
/Gold/Black
46x61cm



FP2430
Silver/White
/Gold/Black
61x76cm




FP3036
Silver/White
/Gold/Black
76x91cm

Light Shed/Tent



Light Shed
LS40 40x40x40cm
LS60 60x60x60cm
LS120 120x120x120cm

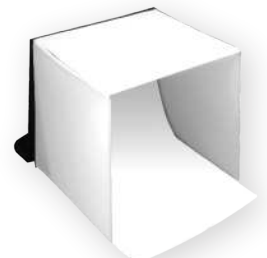

Light tent
LT40 40x40x40cm
LT60 60x60x60cm

Carrying Bags (Studio Kit)



SLB3H
58x25x40cm



SLBLS
Light Stands Carrying Bag
110x20x24cm



SKB-L
Kit Bag
100x31x24cm



SNB
Sand Bag
27x25.5cm

Light Stands



V304



V303

			
V304	87cm	182cm	73cm
V303	100cm	252cm	97cm

Accessories



EX119
Spigot



EX113
Spigot



EX114
16mm
Adapter



EX152
Female
Adapter

Background Support



V8510
Background Supports



EX505
Expan



FOMEX, a leading company in Studio & Video Lighting Industries, through continuous research and development provides you with innovative and high quality products. Integrating advanced technology on our products, we hope in bringing you higher convenience and satisfaction. "Continuous Improvement and Innovation for Customers" is the Fomex Way.

Your kind feedback on our products would be much appreciated.

FOMEX[®]



SCAN
QR CODE
TO SEE FOMEX

Unit701, 31-18Gil, Seongsui-ro, Seongdong-gu, Seoul 04787 Korea Tel +82 2 545 0004 Fax +82 2 3444 9399
www.fomex.com e-mail : info@fomex.com